


SPECIFICATIONS	ECT-20D4
TOWER AVAILABLE WITH UNIT	35FT, 40FT, 50FT, 60FT
ENCLOSED SIZE	204IN L x 96IN W x 78IN H
TRAILER WIDTH OVERALL	102IN
ENCLOSURE INTERIOR HEIGHT	79 IN
TRAILER LENGTH OVERALL (W/O COUPLER)	24FT (288IN)
TRAILER GROSS VEHICLE WEIGHT (GCWR)	9,990 LBS
TRAILER GROSS AXLE WEIGHT (GAWR)	5,200 LBS
TRAILER <i>APPROXIMATE</i> SHIPPING WEIGHT (<i>VARIES W/ DIFFERENT ACCESSORIES</i>)	4,800 LBS
NUMBER OF AXLES	2 (TANDEM)
AXLES CAPACITY RATING (EACH)	5,200 LB
STANDARD COUPLER SIZE	2 5/16IN BALL
BREAKS	4 WHEEL ELECTRIC BRAKES
TIRE SIZE (<i>ALL RADIAL TIRES</i>)	ST225/75R/15
TIRE LOAD RANGE	D
TIRE CAPACITY AND LOAD RATE	2,540 LB
TIRE P.S.I.	65 PSI
WHEEL / RIM SIZE (DIA./WIDTH/BOLT PATTERN)	15IN / 6IN / 8 ON 6.5IN
UID LABEL MIL-STD-130	YES

ACCESSORIES AVAILABLE
Guy Kit Assembly
Anchor Kit
Dual Obstruction Light
Antenna Stand-off
12V DC Electric Winch
Electric Winch for tilting Tower 12V DC
12V DC Battery Pack
All Aluminum Storage Box
Spare Tire
A/C and Heat (Roof or Wall Mounted)
12V Work Lights
120V 500 Watt Floodlight With 5FT Telescoping Pole
120V 500 Watt Removable Floodlight w/ Tripod Base & 50FT Cord
All Aluminum Co-Ax Cable Reel
I/O Port Rostac
Telephone Inlet
Dual Cat5
20 Amp Twist Lock
5Kw to 20Kw Diesel Quiet Run Gen.
Custom All Aluminum Fuel Tank (25 Gal. to 150 Gal.)
Electronic Equipment Rack
Complete Grounding System
Automatic & Manual Transfer Switch
Shore-Power Cord w/ Twist Lock Connection
Dri-Deck Flooring
AB Aluminum Work Station Cabinets
Bunk Bed
Roof Access Ladder
Electric Tongue Jack
Exterior GFI Receptacle
Solar Battery Charge
Aluminum Underbody Dual Battery Box w/ Slide out Tray
Cable Ring
22FT Little Giant Ladder
Interior Co-Ax Cable Tray.

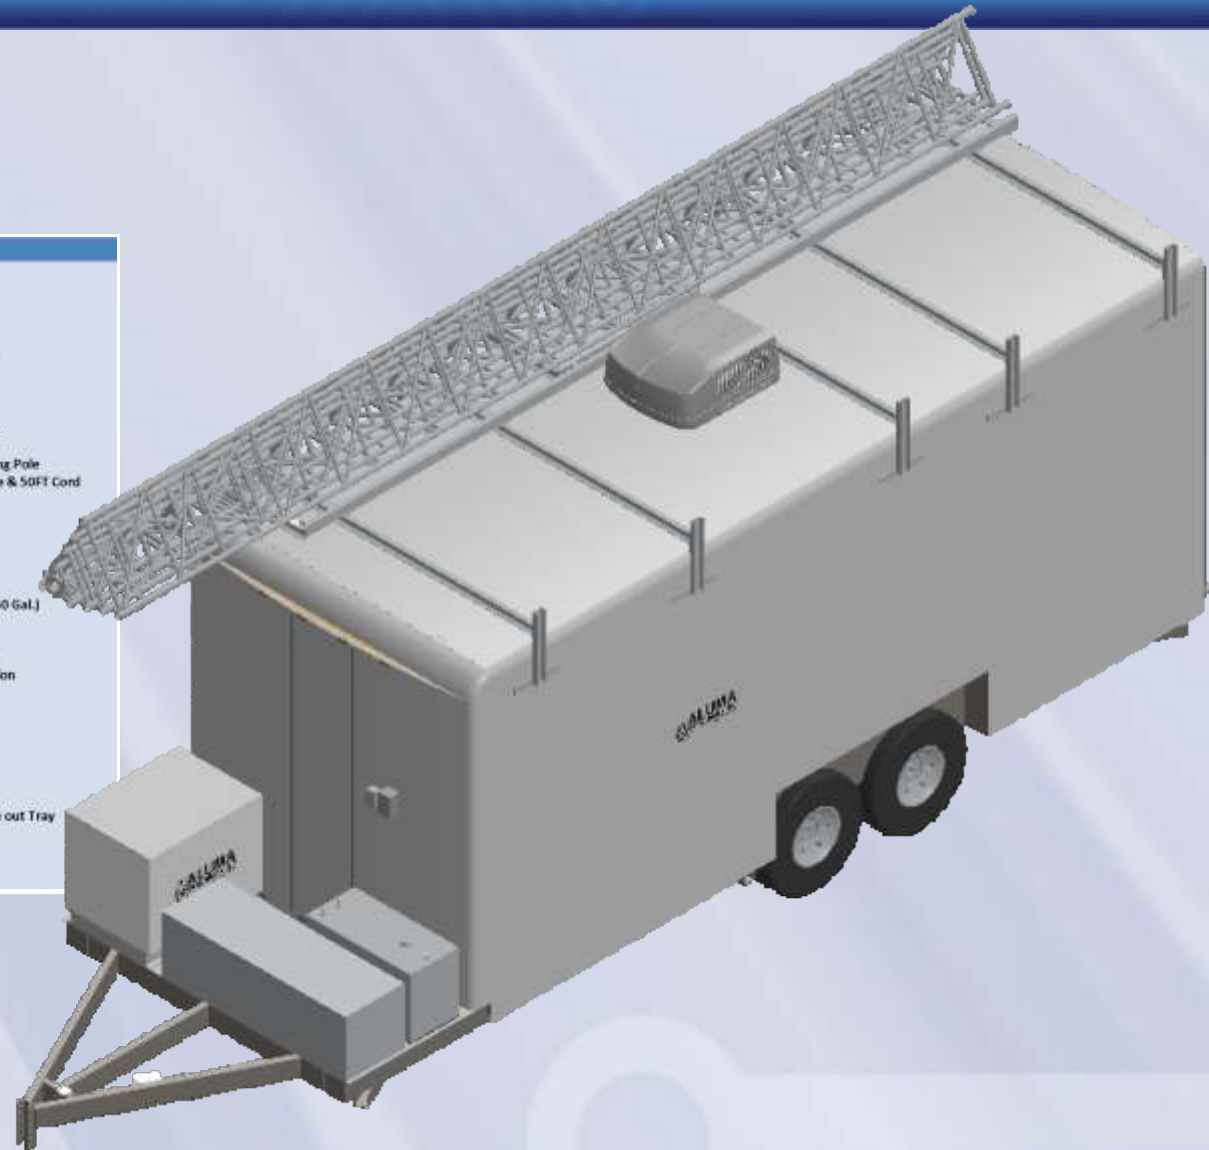

Not drawn to scale.

Aluma Tower Company, Inc. reserves the right to make changes at any time to information contained in this document.